

FIXED BOLLARDS WITH COUNTERFRAME

The fixed 220/PL 600F PILOMAT have been designed and built with architectural appearance similar to that of the retractable PILOMAT bollards and therefore also allows the combined use of both versions.

Current models are the result of the dedication of more than 40 years in the field of access control and a twenty-year specialization in bollards.

GENERAL FEATURES

The fixed PILOMAT bollards are used in public or private areas in order to define or prevent the parking of vehicles, for preventing access to vehicles in pedestrian areas. These items, with a counterframe to wall, in addition to the architectural appearance of the automatic PILOMAT, allow the removal of the bollard in the event of such a removal being needed, or if impact has occurred.




220/PL 600F




OPTIONAL ITEMS

PILOMAT BOLLARD 220/PL 600FFE - NORMAL STEEL PAINTED
PILOMAT BOLLARD 220/PL 600FIXV - STAINLESS STEEL PAINTED
PILOMAT BOLLARD 220/PL 600FIXS - STAINLESS STEEL BRUSHED
HEAD WITHOUT LOGO FOR PILOMAT 220/PL 600F
MULTILED FLASHING LIGHT - 8 LED POINTS
REFLECTING ADHESIVE STRIP - WHITE (NO-LOGO)
PAINTING WITH RAL COLOUR ON REQUEST
FLASHING LIGHT POWER CIRCUIT FOR FIXED BOLLARDS (MAX. 4 BOLLARDS)

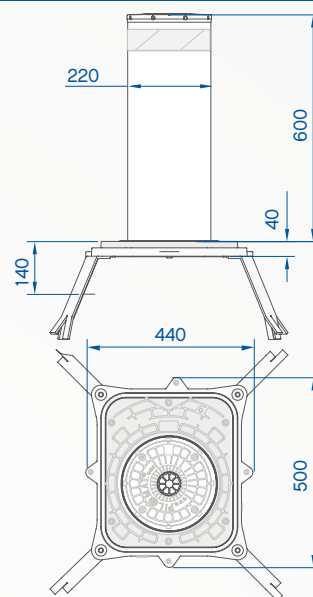

FIXED CYLINDER	NORMAL STEEL FE370 - AISI 304 STAINLESS STEEL
FIXED CYLINDER DIAMETER	220mm
FIXED CYLINDER HEIGHT	600mm
FIXED CYLINDER NORMAL STEEL THICKNESS	4mm
FIXED CYLINDER STAINLESS STEEL THICKNESS	4mm
FIXED CYLINDER NORMAL STEEL FINISH	POLYESTER POWDER PAINT - STANDARD GREY ANTHRACITE
FIXED CYLINDER STAINLESS STEEL FINISH	AS ABOVE OR BRUSHED
REFLECTING ADHESIVE STRIP	YES - HEIGHT 55mm
PROTECTION CLASS	IP67
IMPACT RESISTANCE (WITHOUT DEFORMATION)	30.000 J
BREAKOUT RESISTANCE	150.000 J
BRACKETS INCLUDED	YES - 4 BRACKETS
CONNECTION LINE TO CONTROL UNIT	STANDARD 10m (MAX. LENGTH 80m)

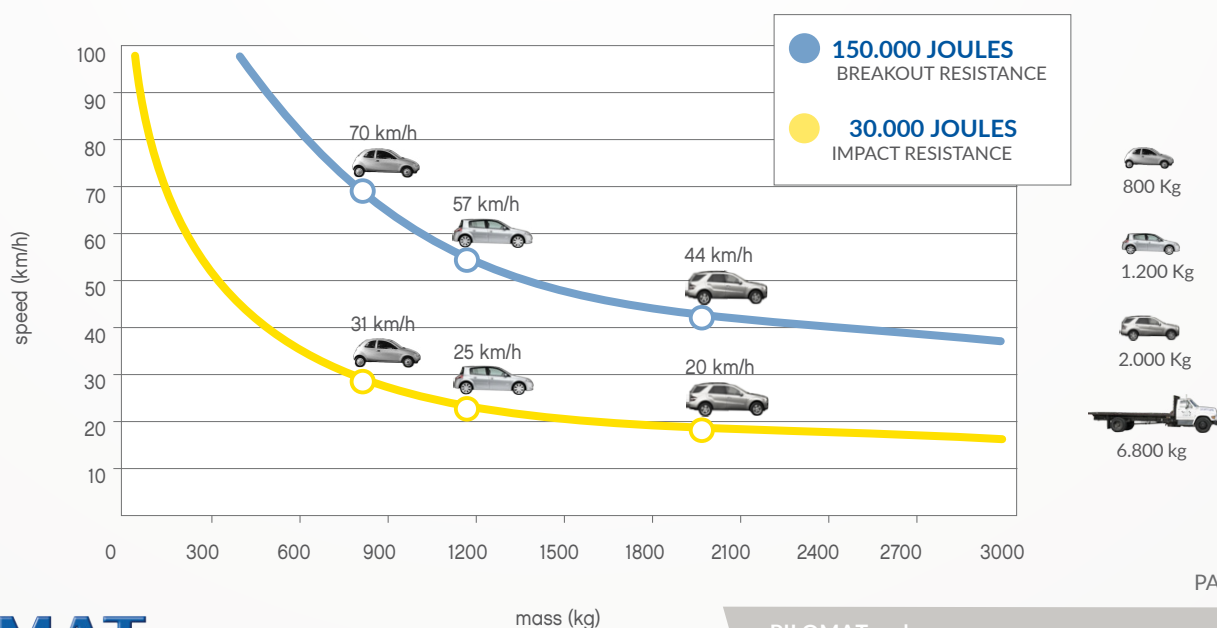

PAG.2/2



PILOMAT s.r.l.
www.pilomat.com / pilomat@pilomat.com
 Via Zanica 17/p, 24050, Grassobbio (BG) Italy
 Tel. +39.035.29.72.20
 Copyright 2016© Pilomat S.r.l. All rights reserved

220/PL 600F_DATASHEET.16 REVIEW 12/05/2016